


AC USE FROM REAR

NOTE 1

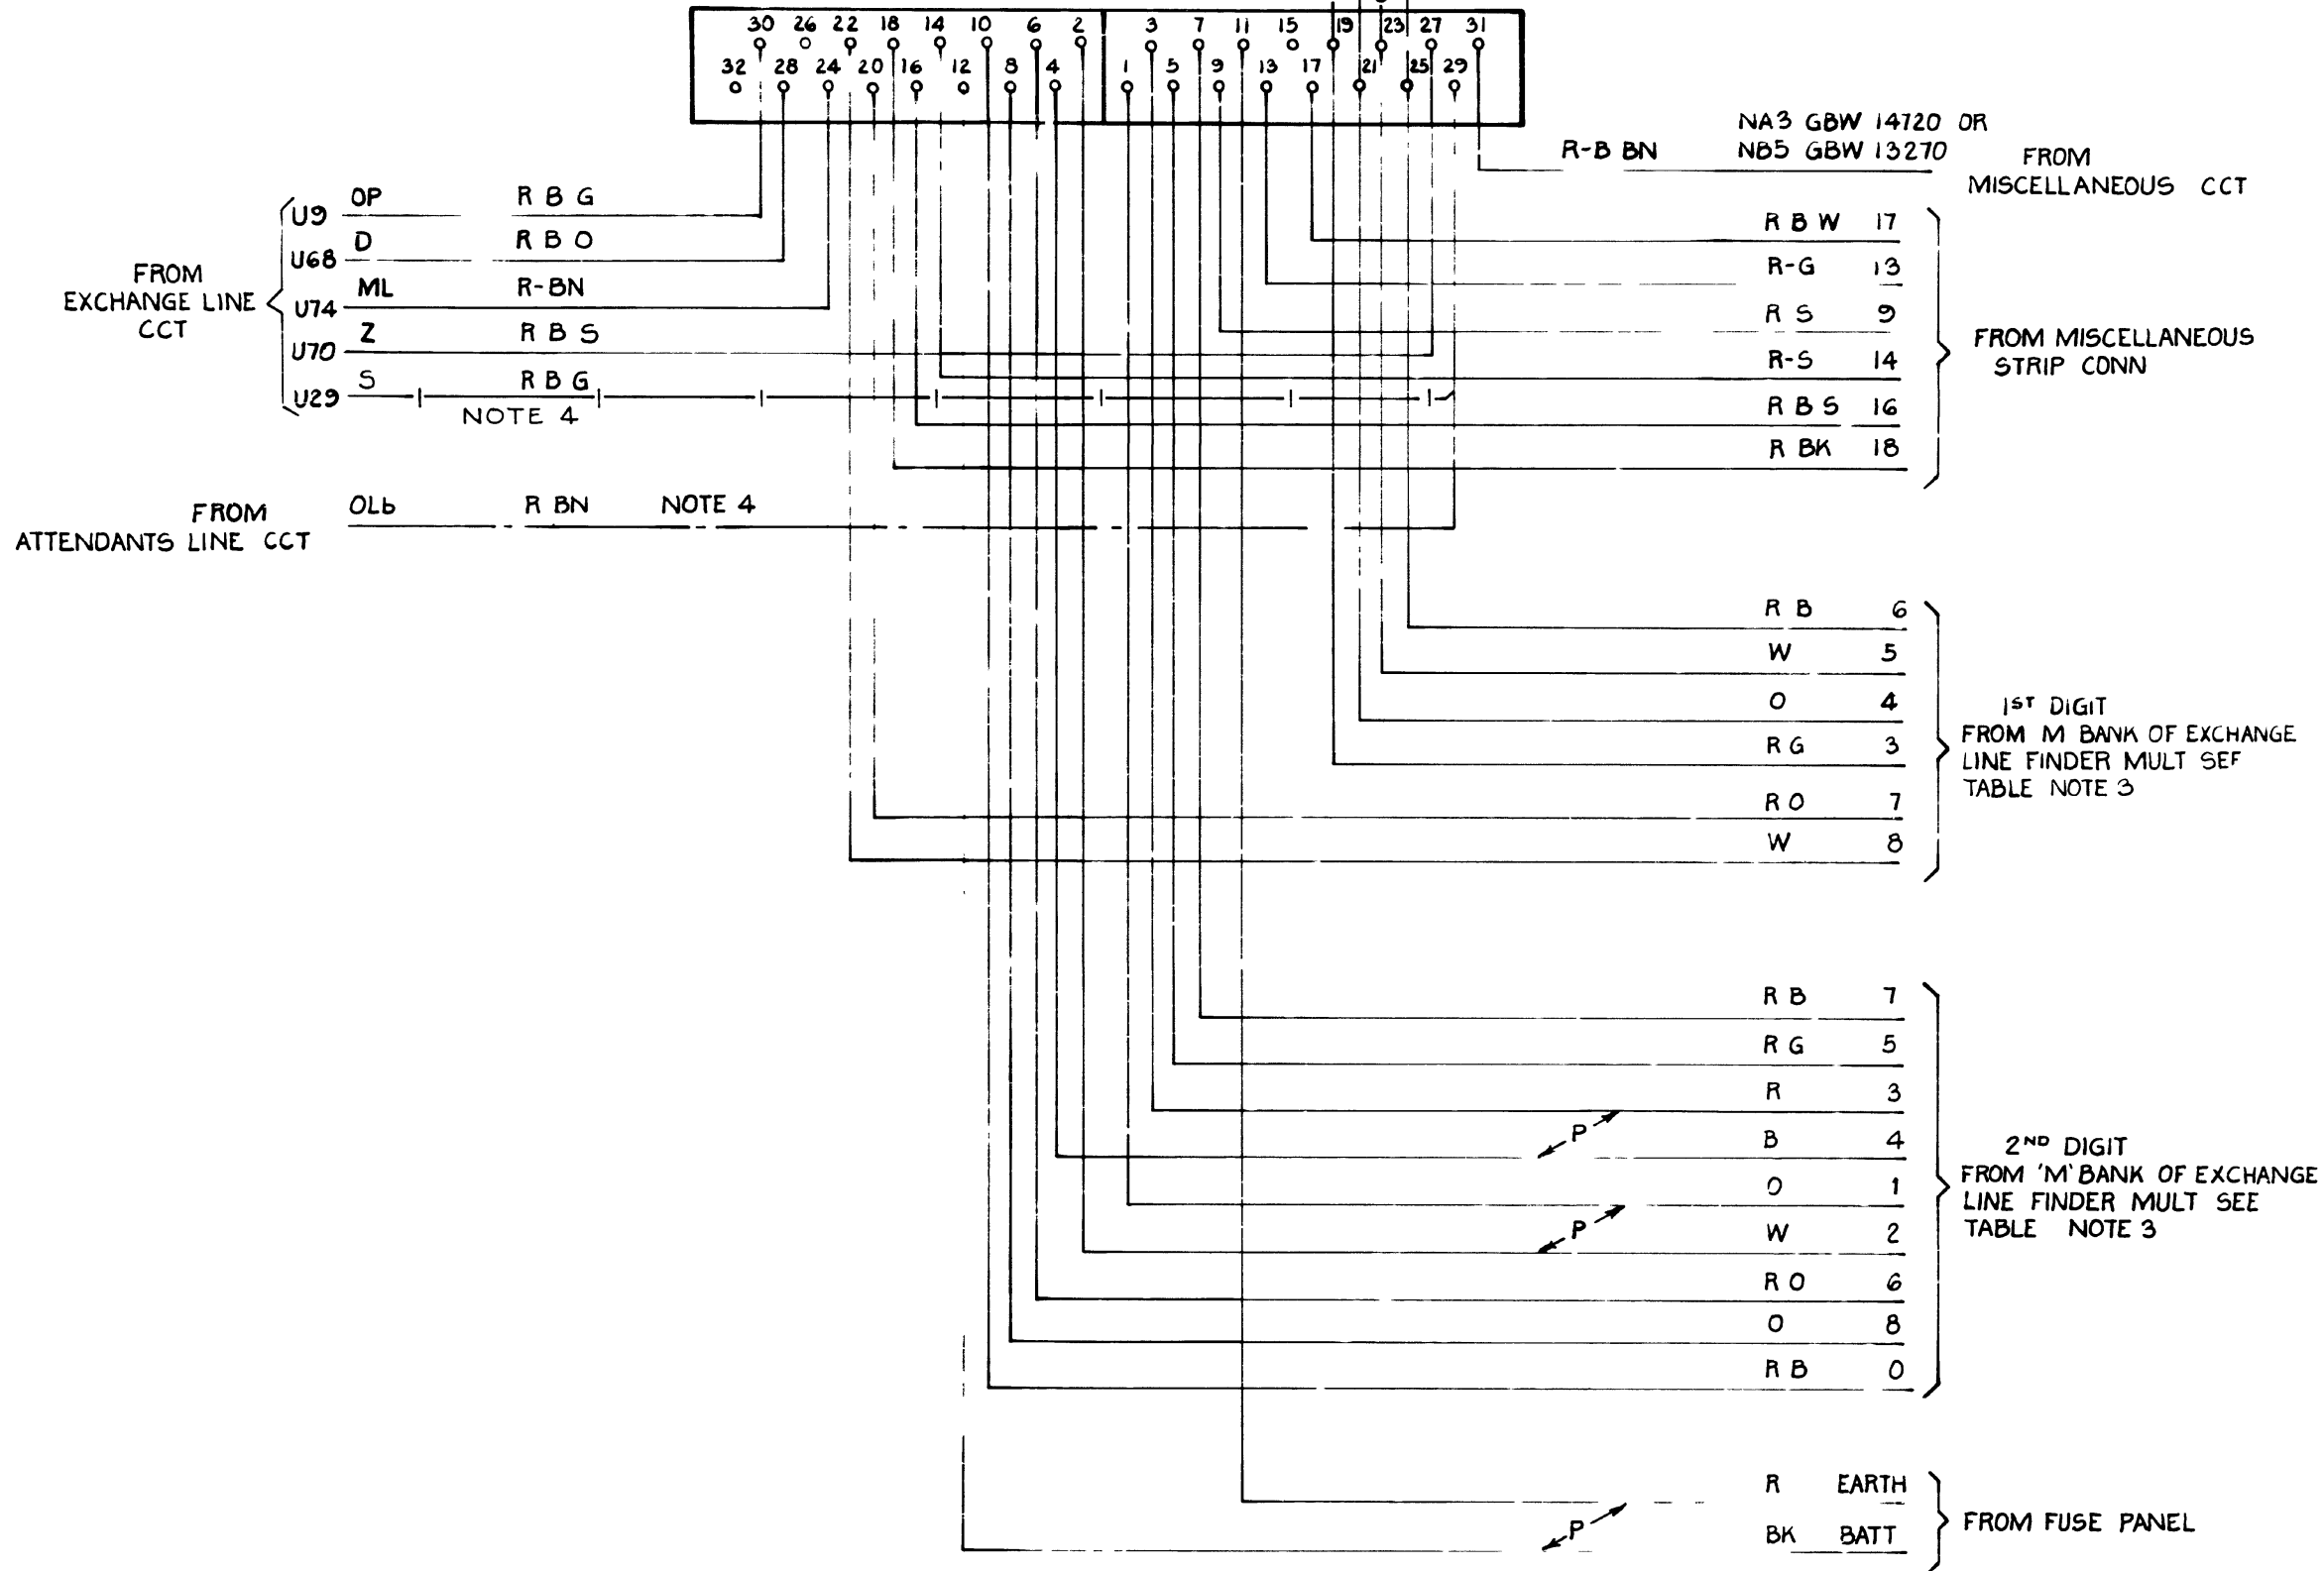

NOTES -

1 ON 20 LINE PABX ADD STRAPS  
U19 21 23 25  
ON 35 LINE PABX ADD STRAPS  
U19 21 ONLY

2 ALL WIRING TO BE 0.5mm UNLESS  
OTHERWISE SPECIFIED

3

SHELF JACK	CONTACT OF EX FINDER M BANK		
	20 LINE	35 LINE	49 LINE
U19	25	50	50
U21			41
U23		31	31
U25		21	21
U20	15	11	11
U22	4	1	1
U1	12	9	9
U2	11	8	8
U3	10	7	7
U4	9	6	6
U5	8	5	5
U6	7	4	4
U7	6	3	3
U8	5	2	2
U10	13	10	10

4 CONNECTION SHOWN - - - IS  
USED ON EARLY EQUIPMENT WITH  
ATTENDANTS LINE CCT TO  
GBW 13270 OR 14720 FOR NEW  
WORK PROVIDE CONNECTION  
SHOWN - - - WITH ATTENDANTS  
LINE CCT GBW 14721

20, 35 & 49 LINE PABX  
MARKER CIRCUITS

DEL	CKD	APP	DATE	ORDER	ISS	CHANGE
		P	15 6 64	65893	3	NOTE 4 & REF ADD WIRE SIZES REVISED
	CJ B	G H B	W J H	26 9 78	157603	3A RETRACED & METRICATED

NZPO	
WIRING	CIRCUIT
DRAWN J.M.N	CHECKED
A35	GBU 13230
30	40

5 Centimetre 10

15 20

25

30