


STORAGE CODE					
FIRST DIGIT RELAYS			SECOND DIGIT RELAYS		
1	CX	6	BY	7	BY, DY
2	AX	7	AY, CY	8	AY, BY, CY
3	AX, CX	8	Y	9	AY, CY
4	AX, CX	9	BY	0	BY

TO A / NK OF E. C. (D) 3 MULT. (EXCH. LINE C.T.)  
(SEE TABLE)

TO B / NK OF E. C. (D) 3 MULT. (EXCH. LINE C.T.)  
I.E.E. OUTLETS TO E. STRAPPED TO CORRESPONDING OUTLET IN THE GROUPS  
(SEE TABLE)

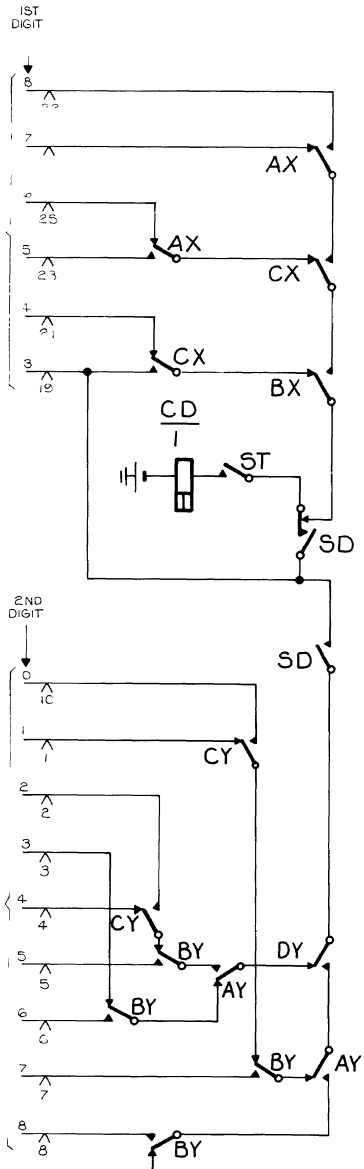

MARKER CIRCUIT  
GBW 13230 OR EQUIV  
EXPLANATORY

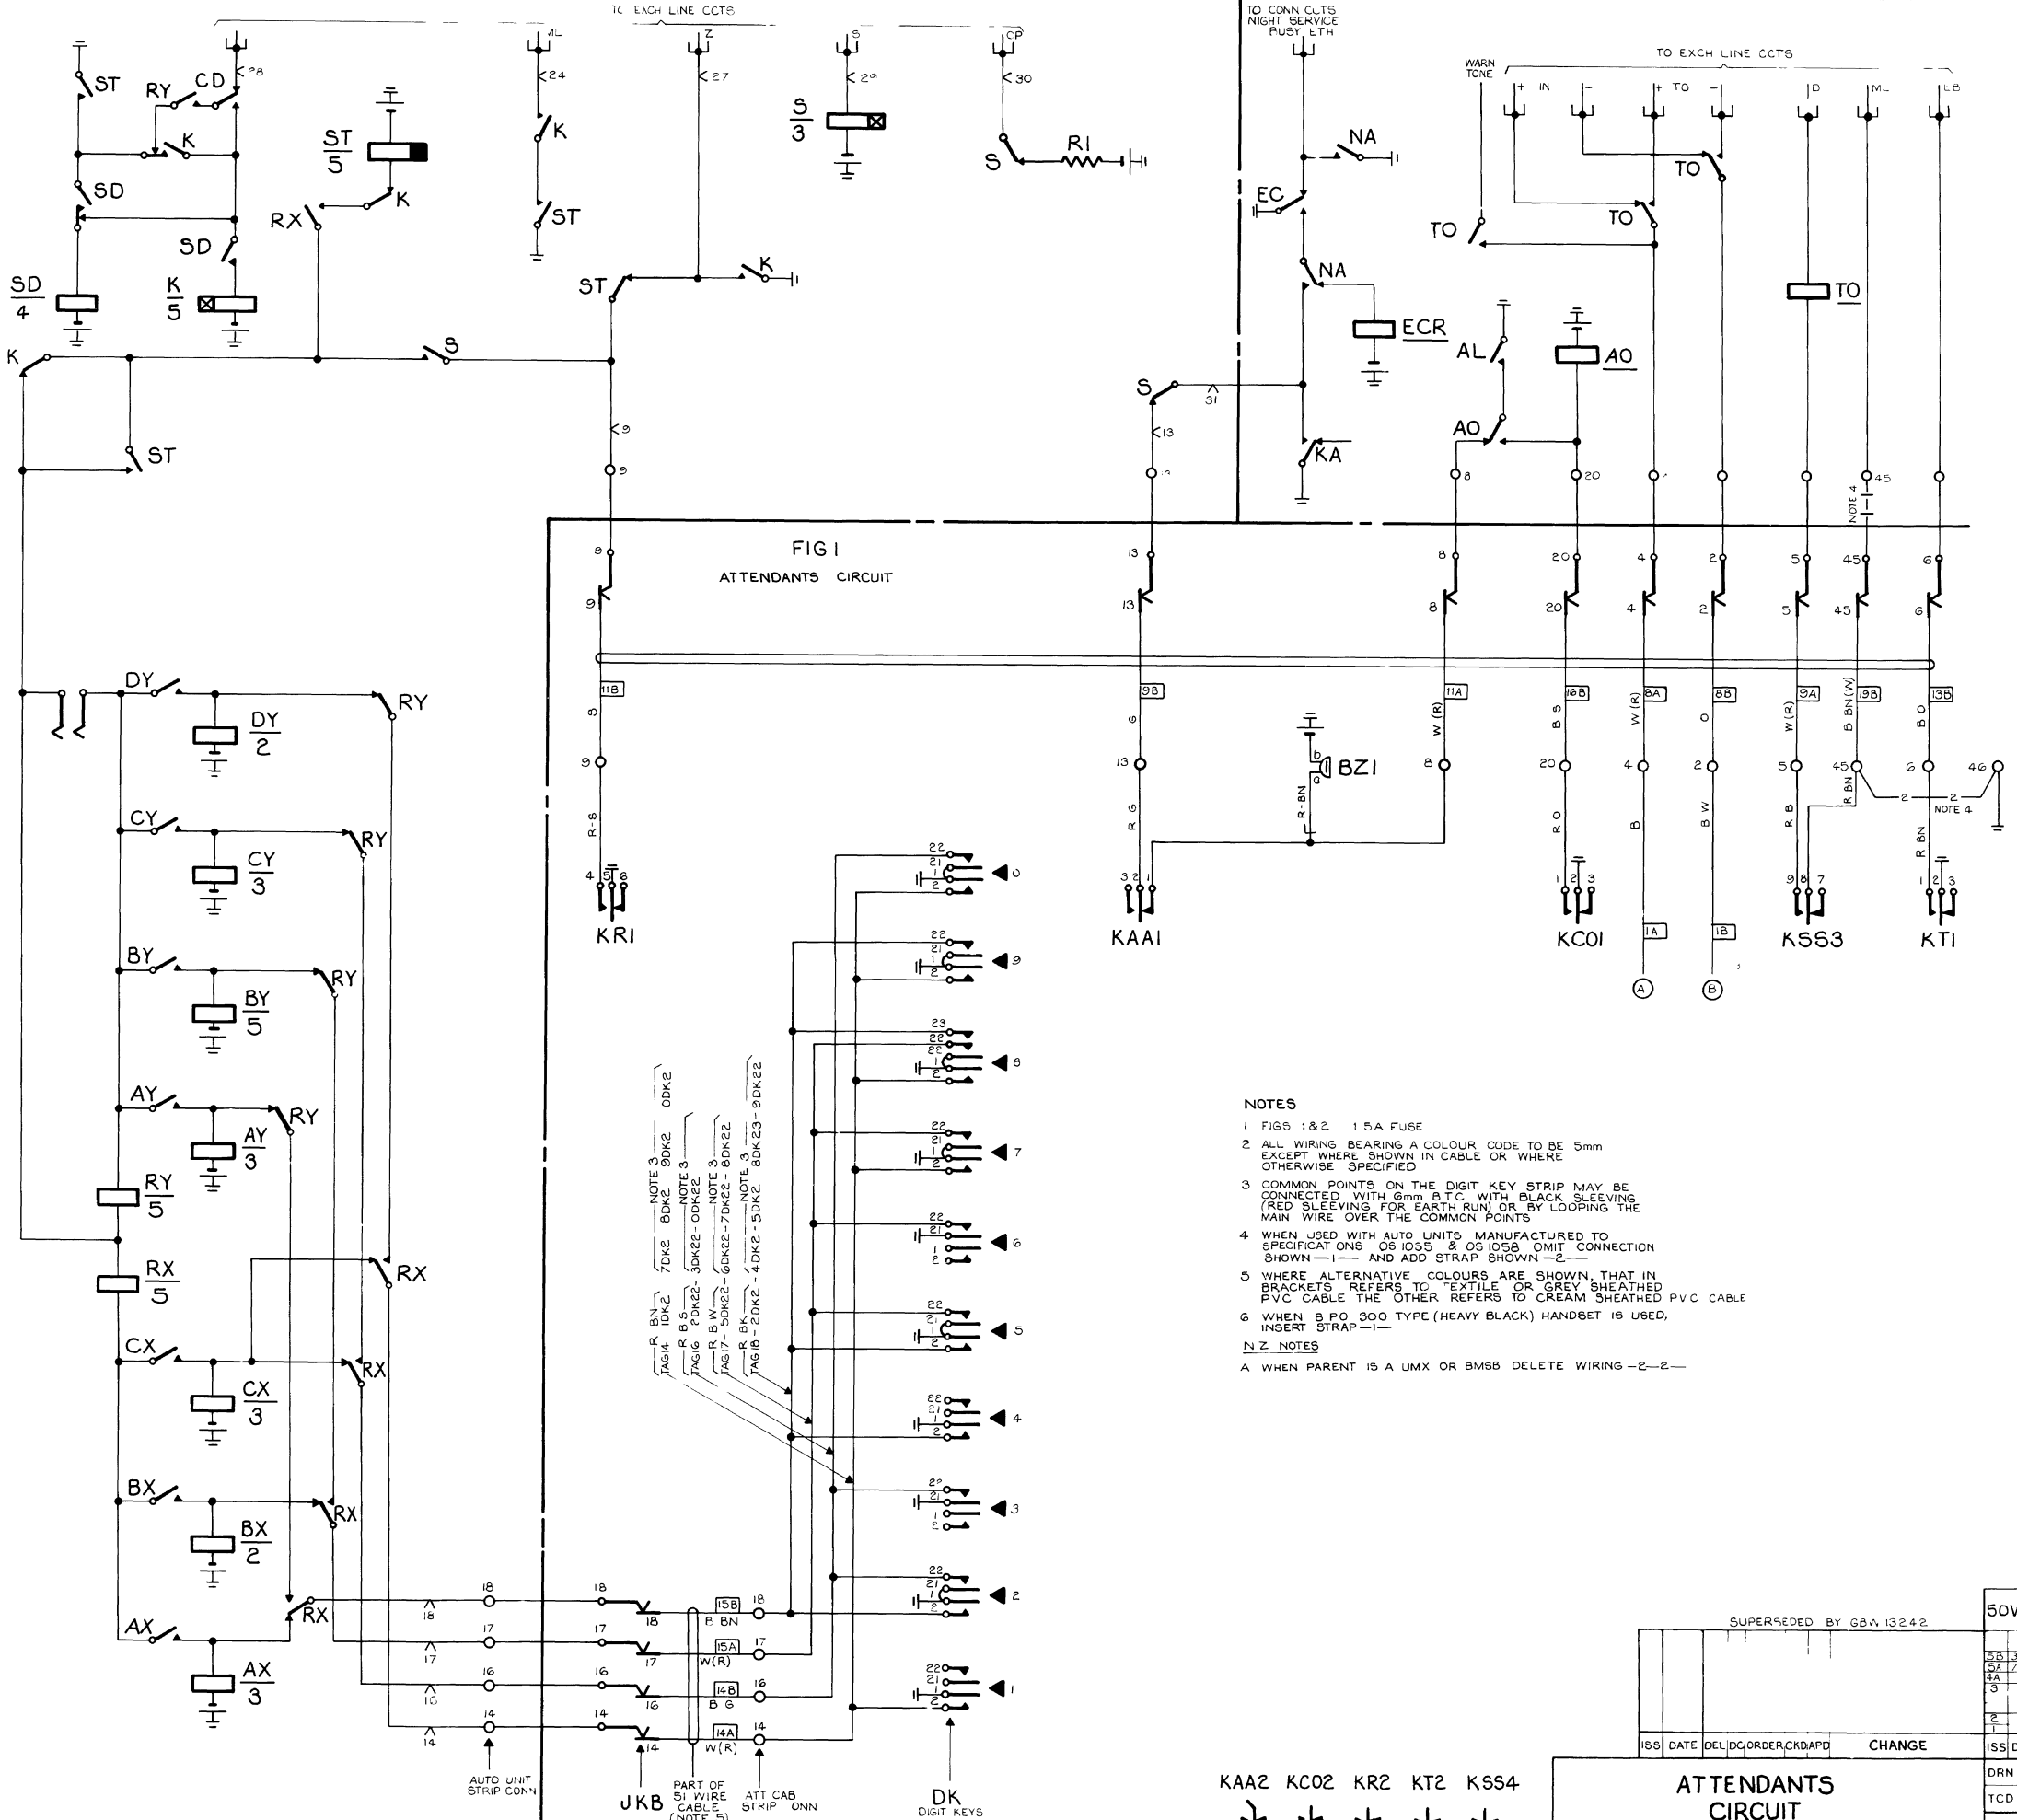


FIG 1  
ATTENDANTS CIRCUIT

- NOTES**
- FIGS 1 & 2 1.5A FUSE
  - ALL WIRING BEARING A COLOUR CODE TO BE 5mm EXCEPT WHERE SHOWN IN CABLE OR WHERE OTHERWISE SPECIFIED
  - COMMON POINTS ON THE DIGIT KEY STRIP MAY BE CONNECTED WITH 6mm B.T.C. WITH BLACK SLEEVING (RED SLEEVING FOR EARTH RUN) OR BY LOOPING THE MAIN WIRE OVER THE COMMON POINTS
  - WHEN USED WITH AUTO UNITS MANUFACTURED TO SPECIFICATIONS OS 1035 & OS 1058 OMIT CONNECTION SHOWN -1- AND ADD STRAP SHOWN -2-
  - WHERE ALTERNATIVE COLOURS ARE SHOWN THAT IN BRACKETS REFERS TO TEXTILE OR GREY SHEATHED PVC CABLE THE OTHER REFERS TO CREAM SHEATHED PVC CABLE
  - WHEN B PO 300 TYPE (HEAVY BLACK) HANDSET IS USED, INSERT STRAP -1-
- N.Z. NOTES**
- A WHEN PARENT IS A UMX OR BMS5 DELETE WIRING -2-2-

KAA2 KCO2 KR2 KT2 KSS4  
21 22 23 21 22 23 26 25 24 21 22 23 25 26 27

SUPERSEDED BY GBW 13242

ISS DATE	DEL/DC ORDER	CKD/APP	CHANGE	ISS DATE	DEL/DC ORDER	CKD/APP	CHANGE

50V W  SLOW RELEASE  SLOW OPERATE

ATTENDANTS CIRCUIT  
20, 35 & 49  
LINE PABX'S

NZPO ENGINEER IN CHIEF WELLINGTON

SHT OF 2  
SIZE A1 GBW 13241

