


AS SEEN FROM REAR

NOTES 1 & 3

30	26	22	18	14	10	6	2	3	7	11	15	19	23	27	31
32	28	24	20	16	12	8	4	1	5	9	13	17	21	25	29
0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

FOR COLOURS SEE TABLE

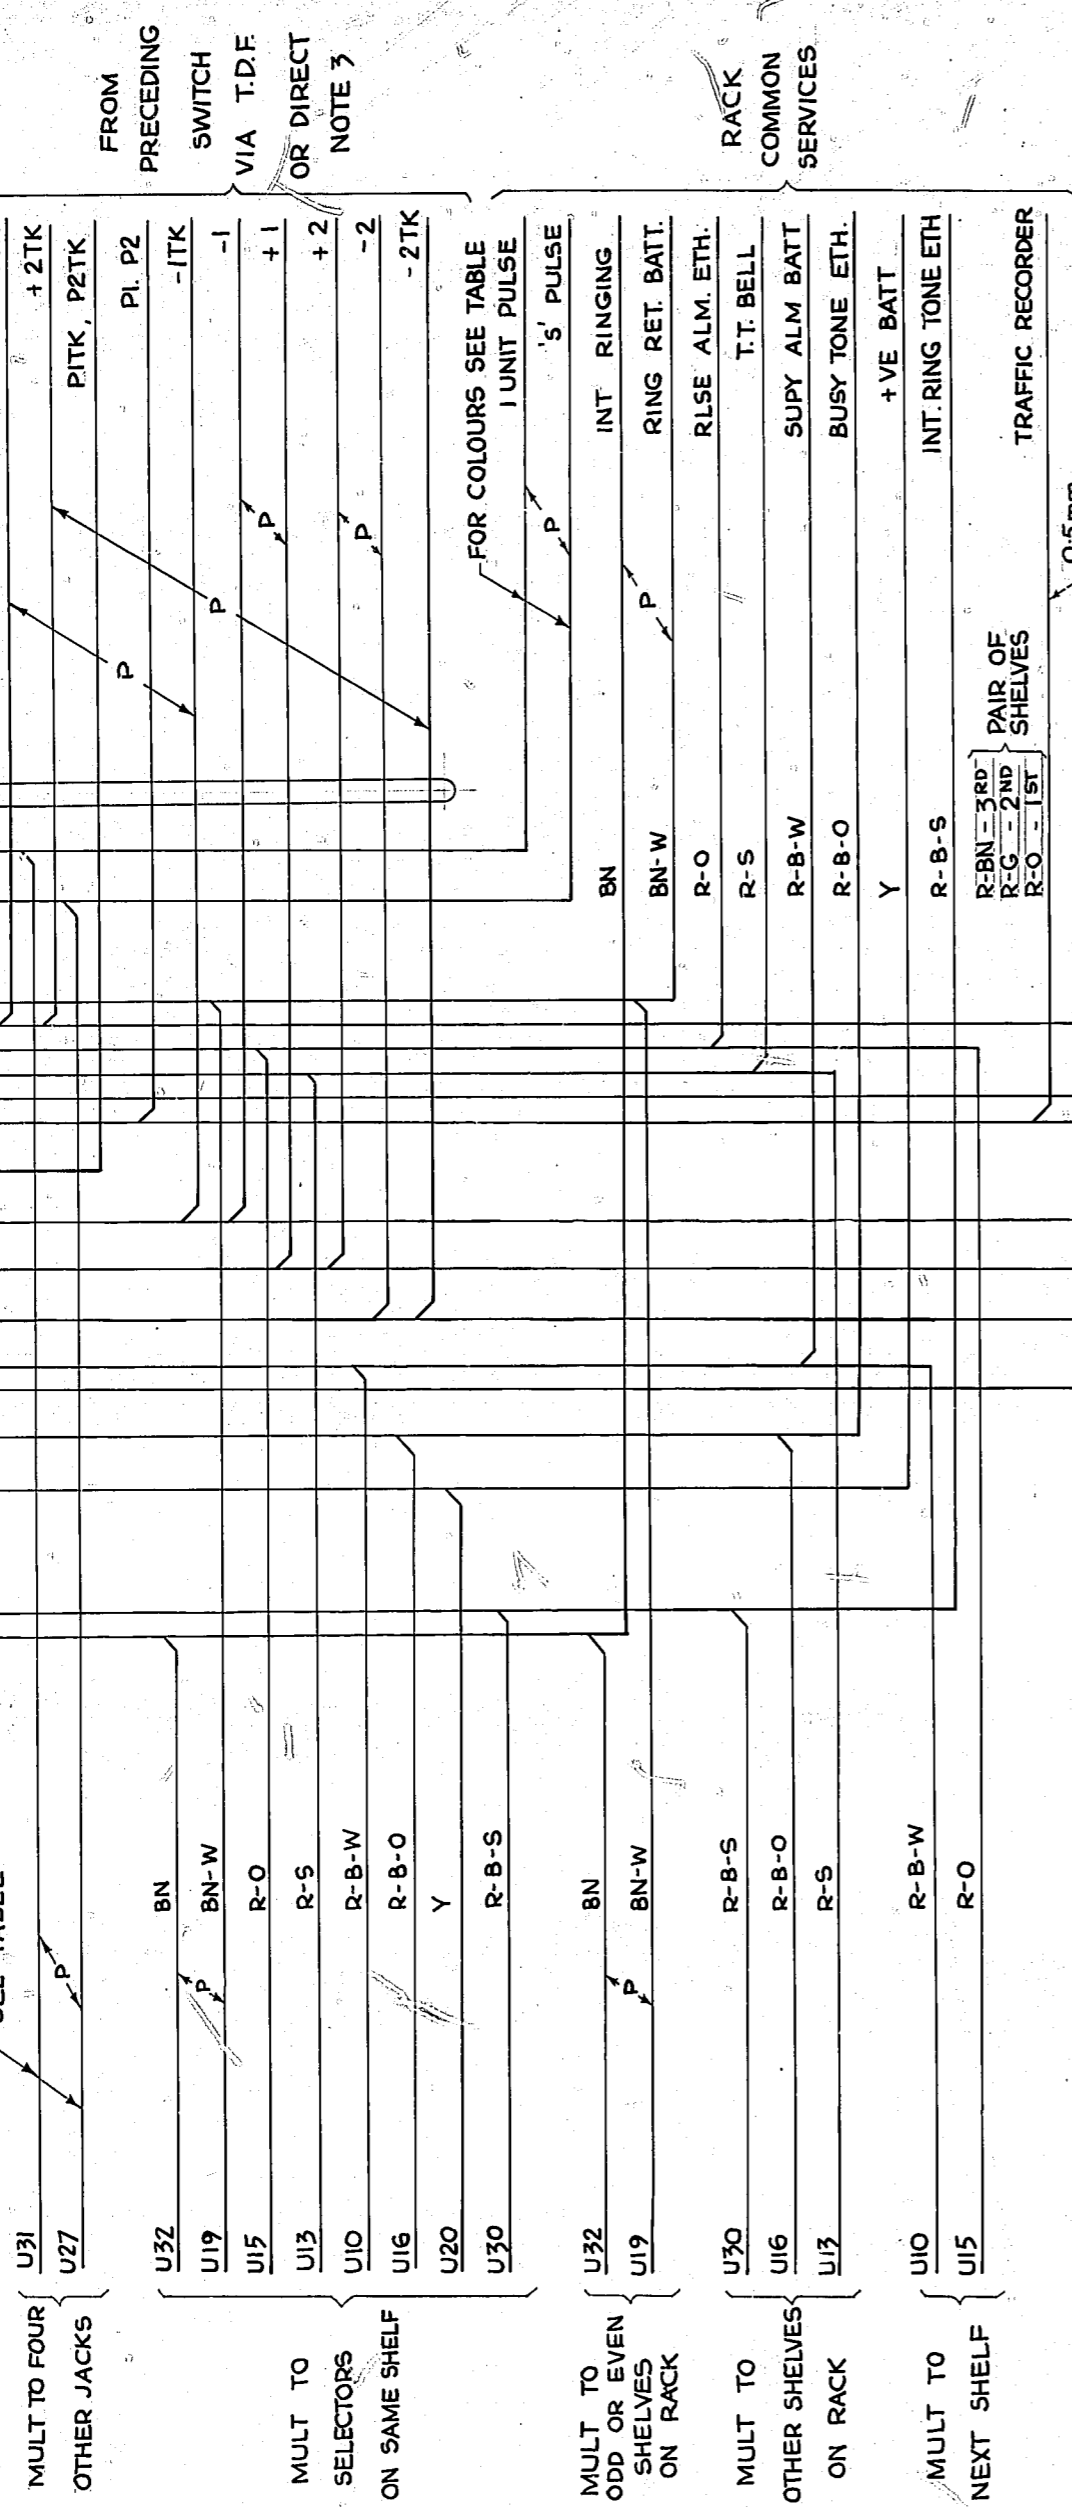

NOTES:-

1. SHELF JACK U-POINTS 9&11 MAKE CONTACT WHEN SELECTOR IS REMOVED
2. ALL WIRING TO BE 0.7mm UNLESS OTHERWISE SPECIFIED
3. WHEN OUTLETS FROM GROUP SELECTORS ARE CABLED DIRECT THE FOLLOWING STRAPS MUST BE APPLIED ON SITE:-
 (A) IN ALL CASES STRAP U11 TO U7
 (B) WHEN SELECTOR IS COMBINED TYPE STRAP U5 TO U9
 (C) WHEN SELECTOR IS ORDINARY TYPE STRAP U5 TO U7
 (D) WHEN NO SELECTOR IS EQUIPPED STRAP U5 TO U7 TO U9
4. ON COMPOSITE U/S & F/S RACKS USE DISTRIBUTION FOR SHELVES E&F
5. USE CONNS -1-1- WHEN ACCESS SELECTOR TO GBW11271 OR EQUIV IS SPECIFIED
6. USE CONNS -2-2- WHEN ACCESS SELECTOR TO GBW 16310 OR GBW16410 OR EQUIV. IS EQUIPPED ON "STANDARD" OR COMPOSITE U/S & F/S RACKS RESPECTIVELY
7. ON COMPOSITE U/S & F/S RACKS WHICH ARE USED IN EXCHANGES ALREADY PROVIDED WITH ACCESS SELECTOR TO GBW 11271 OR EQUIV USE CONNS -1-1- IN ADDITION TO CONNS -2-2- REFERRED TO IN NOTE 6 IN WHICH CASE THE UNISELECTOR ACCESS SELR. EQUIPPED ON THE RACK IS NOT USED ON SOME EARLY EQUIPMENT -VE BATTERY WIRING IS BK AND +VE BATTERY WIRING IS R-B

U27	U31	SELECTORS
G +	G-W	1-5 SHELVES A & D
B +	B-W	6-10 " A & D
O +	O-W	1-5 " B & E
BN +	BN-W	6-10 " B & E
S +	S-W	1-5 " C & F
W +	R-W	6-10 " C & F

RETRACED & METRICATED	(157654)	8A	15-6-78	R&D
BATT. WIRING COLOURS CHANGED NOTE 8 ADDED	(7581)	8	18-12-68	
	(4738)			
REDRAWN NOTES 4-7 & ALTERNATIVE ACCESS CONNS ADDED		7	7-8-63	O&H
AMENDMENT PARTICULARS		ISSUE	DATE	APP'D
N.Z.P.O.		DRAWN	CHECKED	WIRING
				ENG'R'S

200 LINE FINAL SELECTOR
 ORDINARY WITH TOLL FACILITIES
 POSITIVE BATTERY METERING
 2000 TYPE

50V E

GBU 10780 10782
 10781